


**LEAKY ROOF?
FIX IT WITH?**

BUTYL Magic

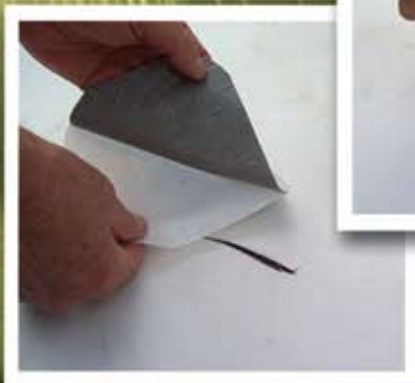

Manufacturing
1-800-248-5445
www.rooferschoice.com

Industrial Strength Adhesive Works in all Climates



Butyl Magic - A **NEW** Alternative to EternaBond®

EternaBond is a product of Adco Global

*Superior Product
at 30% less cost*

Characteristics

- Cold Applied
- Waterproof and self-sealing
- Excellent adhesive properties at low temperatures
- Excellent heat stability
- Excellent in vertical applications
- No flowing under heat
- No oil migration
- Resistant to tear, ageing and UV-rays
- Solvents free
- No special tools are required to install **Butyl Magic**.
- Service temperature -40°F to 240°F

Why Butyl Magic?

- Industrial strength adhesive for permanent repairs and fixes
- Use on EPDM, hypalon and most PVC and TPO roof surfaces. Also works on concrete, gypsum board, plastic, glass, wood, metal roof seams, asphalt and most other building materials
- Will sustain steep and vertical applications in extreme heat without sagging
- Performance stability greater in higher temperatures
- Paintable
- Reinforced aluminum protective film for a true **one step** repair process
- VOC free
- No Minimum order!!!
order 1 roll or 1 truckload



PAINTABLE



Our Product

Butyl Magic is a self-adhesive sealing tape made of a butyl rubber compound, protected by a reinforced metal film in aluminum, available in various sizes/colors.

Butyl Magic is highly adhesive to many materials and especially to plastic, glass, steel, polycarbonate and wood.

Butyl Magic is protected by a metal film in aluminum, making it highly resistant to ageing and oxidizing caused by atmospheric and chemical agents.

Surface Preparation

Butyl Magic is compatible with most building materials, metals and flexible or hard plastics. The surface should be clean, dry, smooth and dust-free. If the installation surface is porous, Butyl Magic Primer must be applied in a quantity of +/- 250 gr/sqm. The use of Butyl Magic Primer is in any case advisable, and the manufacturers instructions must be followed because using the wrong Primer can influence the tape efficiency.

Important Notes

Storage - The quality and the characteristics of materials remain unaltered for a very long time, shelf life is 5 years.

CHARACTERISTICS	VALUE	TEST
Standard Thickness	34 mil +/- 2 mil	-
Compound Color	Grey	-
Tensile Strength	Long.>150 N/50mm Trans.>150 N/50mm	EN 12311-1
Solids	100%	-
Peel Adhesion 90°	16 lbs	ASTM D 1000
Loop Tack Test	16 lbs	ASTM D 6195
Probe Tack Test	6.0 N	ASTM D 2979
Vertical Flow	< 5 mm	ISO 7390
Application Temperature	+24°F / +115°F	-
Service Temperature	-40°F / +240°F. Up to 320°F for max. 24h.	-


Manufactured in Italy

Roof Repair as simple as...

1. Clean



2. Peel & Apply

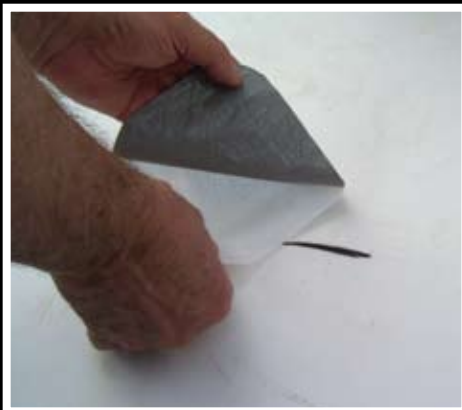

3. Roll




Butyl Magic... For a Permanent Watertight Repair in all Weather Conditions.

Use on EPDM, TPO, PVC, Hypalon, SBS and APP Modified, Asphalt, Metal Roofs and Tile, as well as, many other building materials.

Works on Metal Roofs



Lap Seams

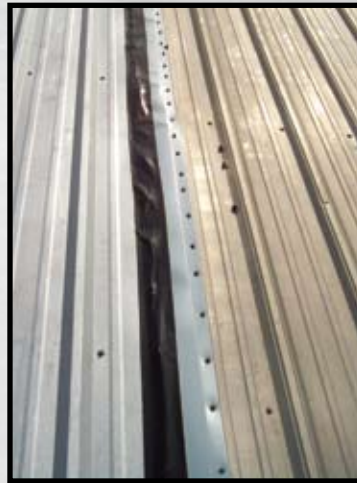

Add-ons



A **UV** stable aluminum backing assures long lasting results and works excellent for end of the day tie-offs.

**Don't leave jobs open.
Seal up unfinished work for tomorrow!**

*Leak
Proof!!!*

PAINTABLE



Materials needed for the
Ultimate one step roof repair

Butyl Magic

- Available in 2", 4", 6" and 12" by 50 feet
- Colors are black, white and aluminum

- # BT2-Black
- # BT2-White
- # BT4-Alum
- # BT4-Black
- # BT4-White
- # BT6-Alum
- # BT6-Black
- # BT6-White
- # BT12-Alum
- # BT12-Black
- # BT12-White



1-800-248-5445

Order online @ www.rooferschoice.com